


ECG vacuum

ergo vac

The new ECG vacuum



10
lead

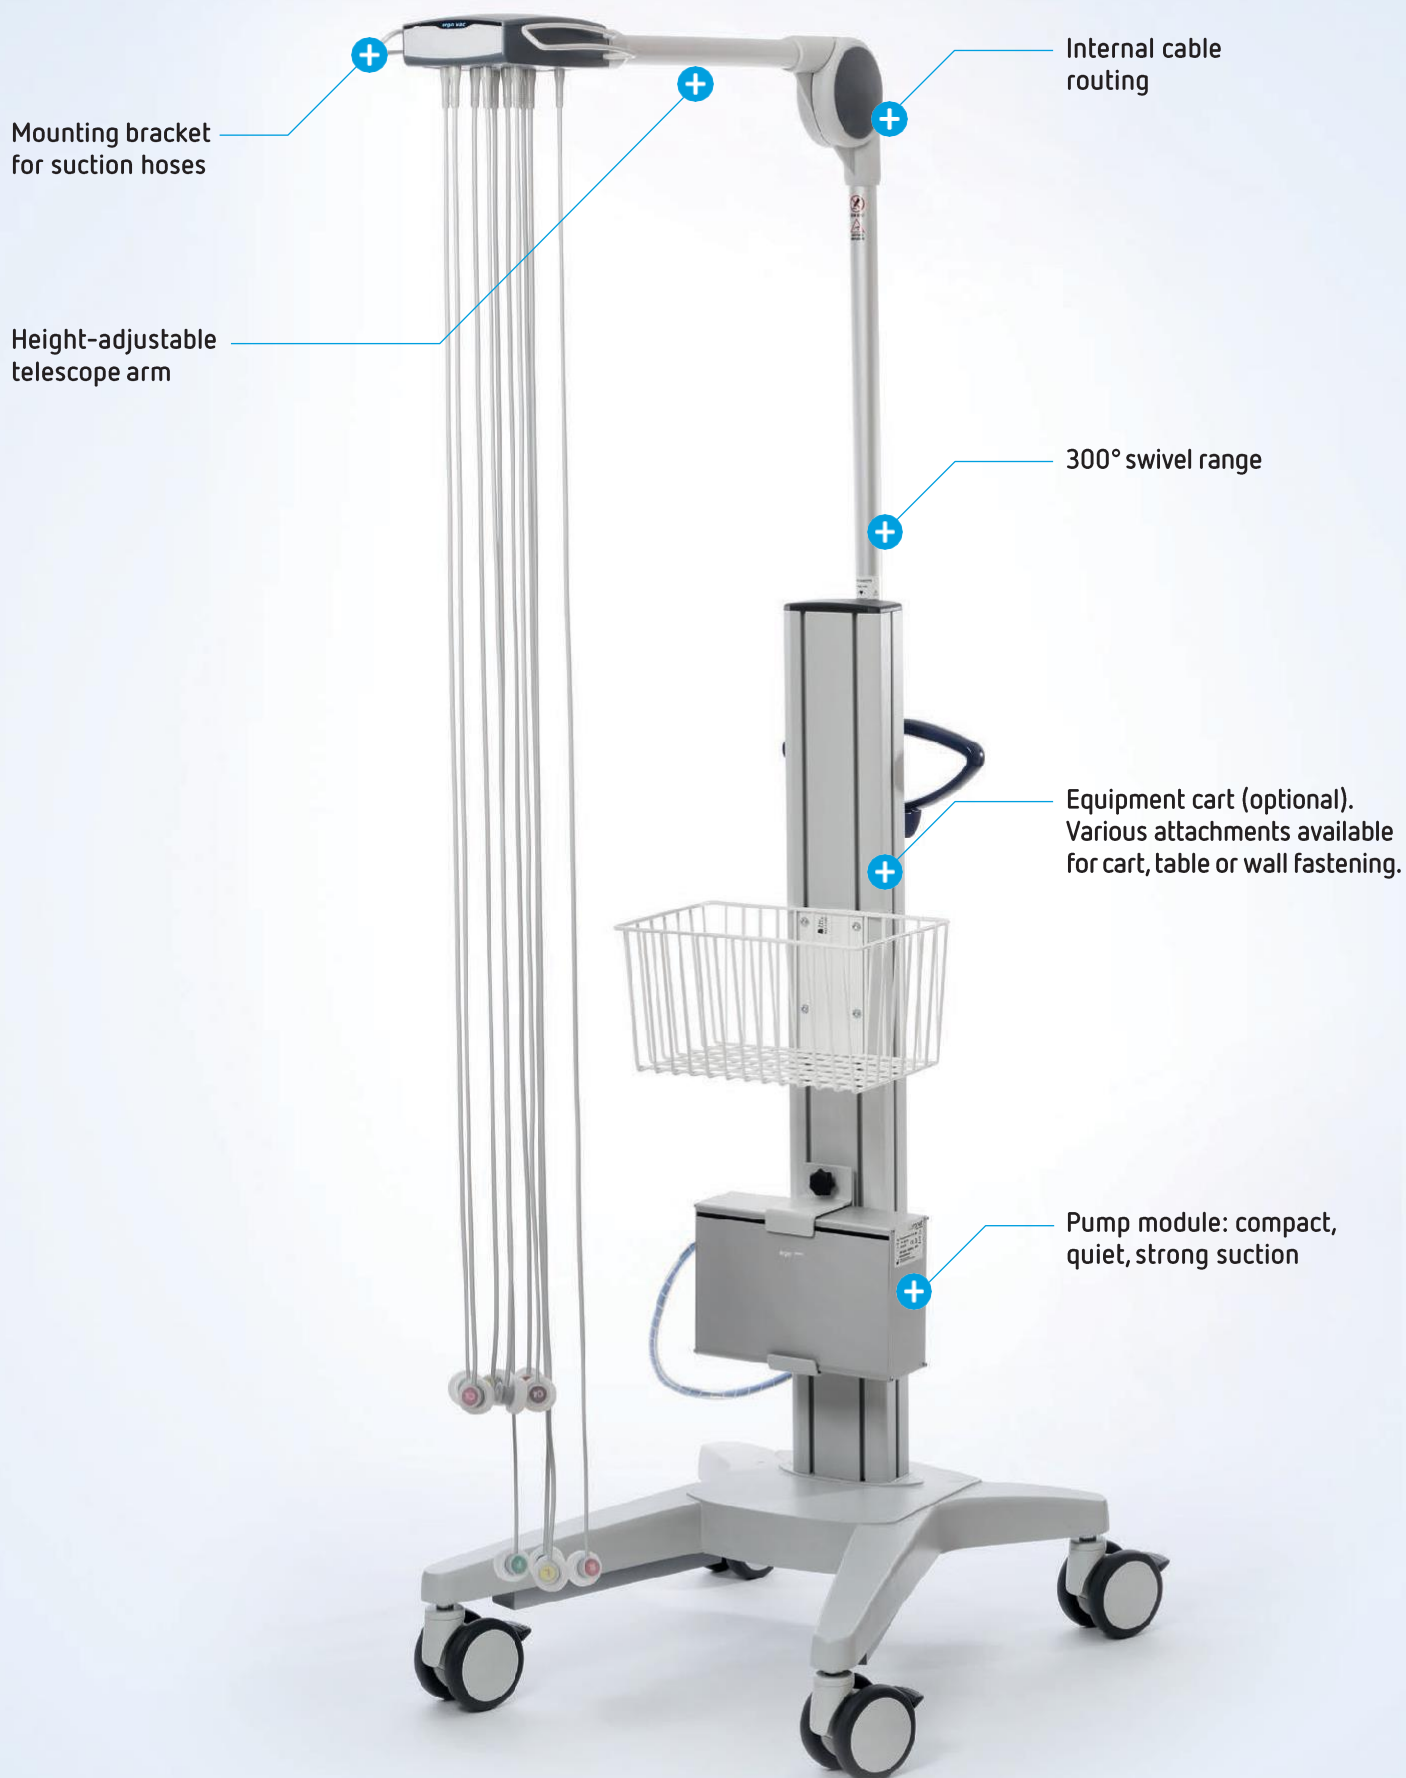

ergo vac

Fast. Convenient. Easy to use.

You can carry out resting and exercise ECG measurements quickly and conveniently with the **ergo vac** suction electrodes. The **ergo vac** is suitable for all types of ECG equipment and can be fastened to various cart systems. If required, we also offer customer-specific fastenings. There is also a blow-out function on the **ergo vac** to blow out moisture and impurities.



Cable arm ergo vac^{LT}

The powerful features of the **ergo vac** are impressive



Fast. Convenient. Easy to use.

ergo vac is currently the quietest and most innovative suction device with a hygienic blow-out function. Network or battery operation (option) possible.



Very simple to operate

The device is operated by using only four keys. LED displays the status. The vacuum power can be adjusted in five settings ranging from 100 to 250 mbar.



Excellent signal quality

ergo vac has a very good signal quality for 10 leads.



Simply hygienic

There is a blow-out function on the **ergo vac** to blow out moisture and impurities.



Universal use

ergo vac can be used flexibly.



Electrode cables

The cable assemblies have silver/silver chloride electrodes with soft silicon suction domes.



Cable arm ergo vac^{LT}

As a special feature, the cable arm has a hidden cable guide and a swivel arm. The head section can be moved flexibly.



Comprehensive user guide

A comprehensive user guide with operating instructions, safety information and practical tips is supplied with the **ergo vac** suction unit.

Technical data

Pump module

Dimensions	245 × 175 × 82 mm
Weight	2.4 kg / 3.5 kg (without / with accumulator)
Power supply Power consumption	100 – 240 VAC 30 VA
Battery (optional) Lifetime Time to charge to 100% Charging duration during operation	Lead accumulator approx. 800 charging cycles approx. 3.5 hours approx. 3.5 hours
Ambient conditions Operating temperature Relative air humidity Air pressure during operation	10 – 50 °C, storage 10 – 40 °C 30 – 75% (not condensing) 700 – 1,060 hPa
Low pressure	0 – 500 mbar
Airflow	0 – 5.5 l/min

Patient module

5 vacuum levels	100, 150, 180, 210, 250 mbar
------------------------	------------------------------

System cable

System cable	1.9 m
ECG connection	15-lead, in accordance with IEC Standard norm
Control cable	1.5 m
Hose	1.5 m

Electrodes

Material	Sintered Ag/AgCl, silicone suction cup
-----------------	--

Cable arm

	<i>ergo vac</i>	<i>ergo vac^{LT}</i>
Length	800 – 1100 mm	505 – 945 mm
Range of height adjustment	1000 – 2000 mm	835 mm
Pivot range	300°	270°

Safety standards

Safety standard	IEC/EN 60601-1, Protection Class I
EMC	IEC/EN 60601-1-2
Conformity/Classification	CE/I according to the Regulation 2017/745/EU
Protection	This device is not designed for outdoor use (IPX0)



MEDICARE AG

Hauptstrasse 51 CH-5024 Küttigen • Tel.: +41 (0)44 482 482 6
Mail: info@medicareag.ch • Web: www.medicareag.ch

mbnet
engineering

mbnet Engineering GmbH
Kirschauer Str. 37a
OT Callenberg
02681 Schirgiswalde-Kirschau
Germany
Phone +49 3592 34830
Fax +49 3592 34344
verkauf@mbnet.de
www.mbnet.de